




N-Channel Enhancement Mode Field Effect Transistor



SOT-323

Product Summary

- V_{DS} 50V
- I_D 340mA
- $R_{DS(ON)}$ (at $V_{GS}=10V$) $<2.5\Omega$
- $R_{DS(ON)}$ (at $V_{GS}=4.5V$) $<3.0\Omega$

General Description

- Trench Power MV MOSFET technology
- Voltage controlled small signal switch
- Low input Capacitance
- Fast Switching Speed
- Low Input / Output Leakage

Applications

- Battery operated systems
- Solid-state relays
- Direct logic-level interface: TTL/CMOS

■ Absolute Maximum Ratings ($T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Limit	Unit
Drain-source Voltage	V_{DS}	50	V
Gate-source Voltage	V_{GS}	± 20	V
Drain Current	I_D	$T_A=25^\circ\text{C}$ @ Steady State	mA
		$T_A=70^\circ\text{C}$ @ Steady State	
Pulsed Drain Current ^A	I_{DM}	1.5	A
Total Power Dissipation @ $T_A=25^\circ\text{C}$	P_D	150	mW
Thermal Resistance Junction-to-Ambient @ Steady State ^B	$R_{\theta JA}$	833	$^\circ\text{C}/\text{W}$
Junction and Storage Temperature Range	T_J, T_{STG}	$-55\sim+150$	$^\circ\text{C}$

■ Ordering Information

PREFERRED P/N	PACKING CODE	Marking	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
BSS138W	F2	SS.	3000	30000	120000	7" reel



BSS138W

■ Electrical Characteristics (T_J=25℃ unless otherwise noted)

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Static Parameter						
Drain-Source Breakdown Voltage	BV _{DSS}	V _{GS} = 0V, I _D =250μA	50			V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =50V, V _{GS} =0V			1	μA
Gate-Body Leakage Current	I _{GSS1}	V _{GS} = ±20V, V _{DS} =0V			±100	nA
	I _{GSS2}	V _{GS} = ±10V, V _{DS} =0V			±50	nA
Gate Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D =250μA	0.8	1.2	1.6	V
Static Drain-Source On-Resistance	R _{DS(ON)}	V _{GS} = 10V, I _D =300mA		1.1	2.5	Ω
		V _{GS} = 4.5V, I _D =200mA		1.2	3.0	
Diode Forward Voltage	V _{SD}	I _S =300mA, V _{GS} =0V			1.2	V
Maximum Body-Diode Continuous Current	I _S				340	mA
Dynamic Parameters						
Input Capacitance	C _{iss}	V _{DS} =25V, V _{GS} =0V, f=1MHZ		28.5		pF
Output Capacitance	C _{oss}			2.7		
Reverse Transfer Capacitance	C _{rss}			1.78		
Switching Parameters						
Total Gate Charge	Q _g	V _{GS} =10V, V _{DS} =25V, I _D =0.3A		1.7		nC
Gate-Source Charge	Q _{gs}			0.4		
Gate-Drain Charge	Q _{gd}			0.24		
Reverse Recovery Charge	Q _{rr}	I _F =0.3A, di/dt=-100A/us		2.65		
Reverse Recovery Time	t _{rr}			12.2		
Turn-on Delay Time	t _{D(on)}	V _{GS} =10V, V _{DD} =25V, I _D =300mA, R _{GEN} =6Ω		2.6		ns
Turn-on Rise Time	t _r			18.8		
Turn-off Delay Time	t _{D(off)}			9.7		
Turn-off fall Time	t _f			47		

A. Pulse Test: Pulse Width ≤ 300us, Duty cycle ≤ 2%.

B. Device mounted on FR-4 PCB, 1 inch x 0.85 inch x 0.062 inch.



■ Typical Performance Characteristics

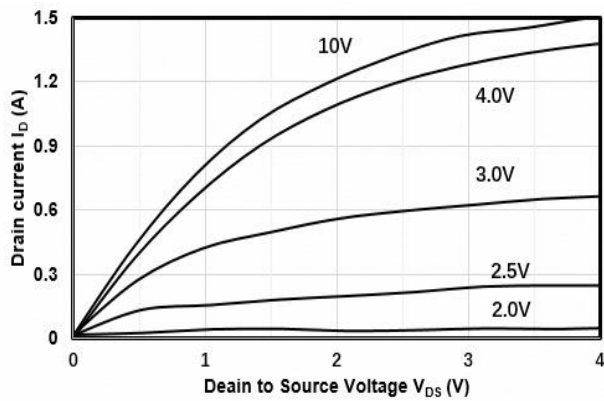


Figure1. Output Characteristics

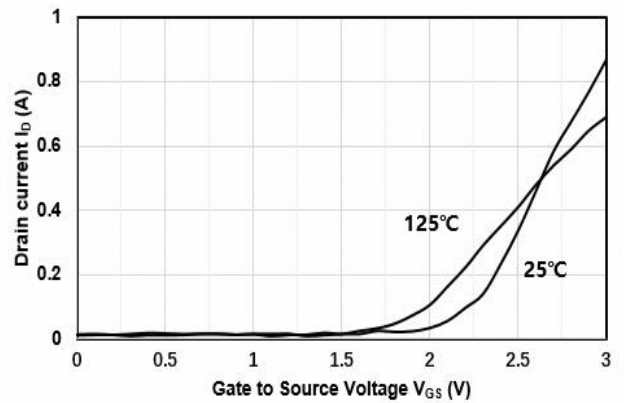


Figure2. Transfer Characteristics

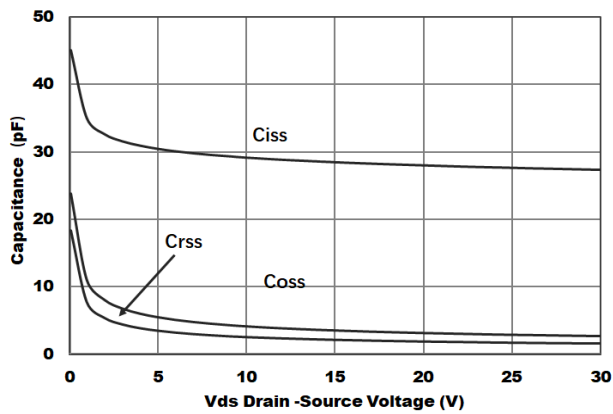


Figure3. Capacitance Characteristics

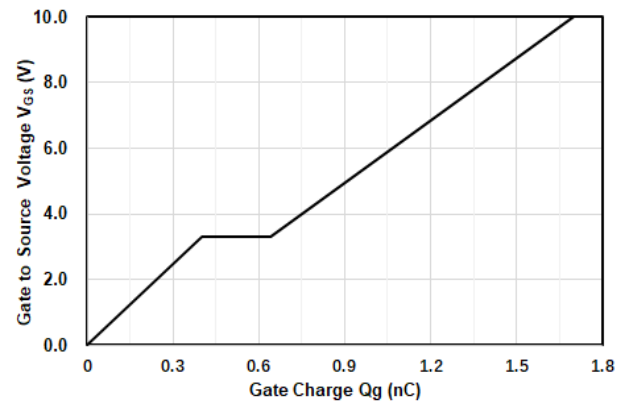


Figure4. Gate Charge

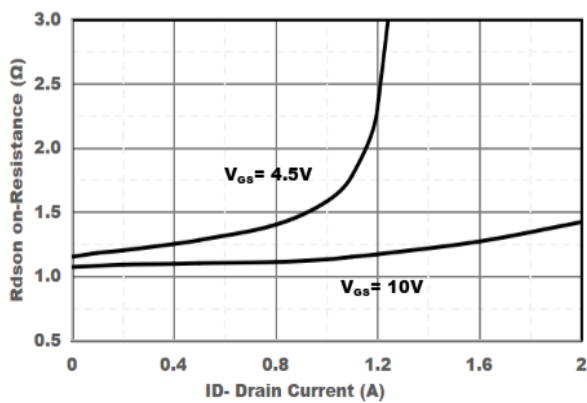


Figure5. Drain-Source on Resistance

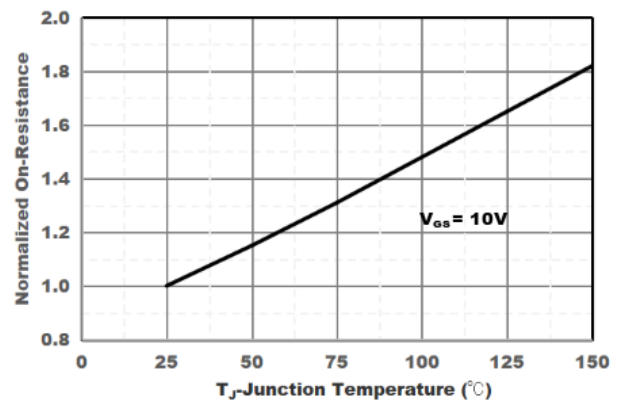


Figure6. Drain-Source on Resistance



BSS138W

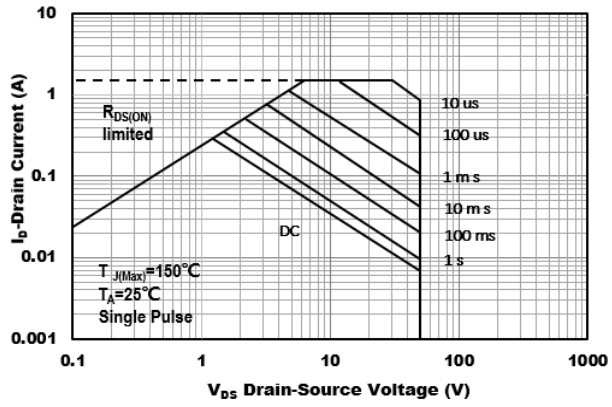


Figure7. Safe Operation Area


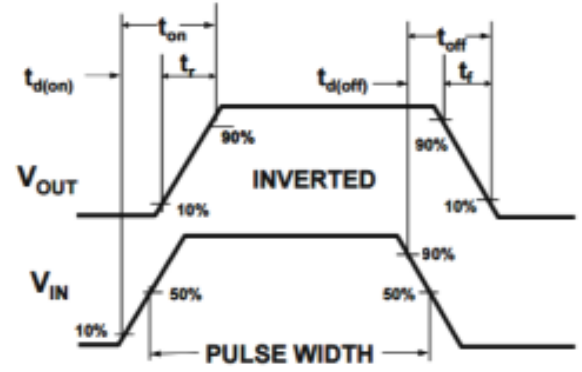


Figure8. Switching wave




BSS138W


■ SOT-323 Package Information




TOP VIEW



SIDE VIEW



SIDE VIEW



SUGGESTED SOLDER PAD LAYOUT

SYMBOL	INCHES			Millimeter		
	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.
A	0.035	----	0.043	0.900	----	1.100
A1	0.000	----	0.004	0.000	----	0.100
A2	0.035	0.037	0.039	0.900	0.950	1.000
b	0.006	0.012	0.016	0.150	0.300	0.400
c	0.004	----	0.010	0.100	----	0.250
D	0.071	0.079	0.087	1.800	2.000	2.200
E	0.045	0.049	0.053	1.150	1.250	1.350
E1	0.085	0.091	0.096	2.150	2.300	2.450
e	0.026TYP			0.650TYP		
e1	0.047	0.051	0.055	1.200	1.300	1.400
L	0.021REF			0.525REF		
L1	0.010	0.014	0.018	0.260	0.360	0.460
θ	0°	----	8°	0°	----	8°

NOTE:

- 1.PACKAGE BODY SIZES EXCLUDE MOLD FLASH AND GATE BURRS.
- 2.TOLERANCE 0.1mm UNLESS OTHERWISE SPECIFIED.
- 3.THE PAD LAYOUT IS FOR REFERENCE PURPOSES ONLY.



BSS138W

Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.